

LOW PROFILE STATIC SCISSOR TABLE

- Capacities ranging from 600KG-2000kg
- Lift heights from 860mm-1070mm
- A range of platform sizes available- all of this enables the end user to have a solution that exactly fits the application
- Available with U-Shape platform so that the unit can be loaded easily with a pallet truck
- Safety cut off bar and manual emergency lowering valve fitted on all units to improve safety
- High quality robust construction gives added strength.
- Unit coated with a polyurethane lacquer preventing rusting
- These tables allow operators to adopt the correct working position and tackles topical Health and safety issues



Technical Features:

- Power supply 3 phase
- Control voltage: 24v on all functions including solenoid valve
- Push button control with 2500mm cable
- Manual emergency lowering
- Pressure compensating lowering valve
- Adjustable return valve
- Safety cut-off bar to prevent the table from lowering in the case of an obstruction
- Maintenance safety bar for service
- All models comply with safety regulations 950101, Advice Directive 89/392/EEC, Advice Directive 73/23/EEC



Technical Specification:

Low Profile Static Table, Low profile including ramp

Reference	Capacity KG	Platform L x W	Travel	Closed Height	Lifting Speed
TR-BD-40311	600	1500 X 800	800	80	21
TR-BD-40312	1000	1500 X 800	800	80	21
TR-BD-40314	1500	1500 X 800	800	80	32
TR-BD-40316	2000	1500 X 800	800	100	43
TR-BD-40321	600	1610 X 800	970	80	21
TR-BD-40322	1000	1610 X 800	970	80	21
TR-BD-40324	1500	1610 X 800	970	80	32
TR-BD-40326	2000	1610 X 800	970	100	43

Low Profile "U" Shape

Reference	Capacity KG	Platform L x W	Travel	Closed Height	Lifting Speed
TR-BD-40401	600	1610 X 1100	780	80	21
TR-BD-40402	1000	1610 X 1100	800	80	21
TR-BD-40404	1500	1610 X 1300	800	100	43
TR-BD-40406	2000	1610 X 1300	800	100	43
TR-BD-40411	600	1610 X 1100	970	80	21
TR-BD-40412	1000	1610 X 1100	970	80	21
TR-BD-40413	1500	1610 X 1300	970	100	43
TR-BD-40414	2000	1610 X 1300	970	100	43


"U" Shape low profile table (585mm gap for pallet truck access)

	A CAPACITY	B RAISED HEIGHT	C CLOSED HEIGHT	D PLATFORM WIDTH	D PLATFORM LENGTH	LIFTING TIME	POWER PACK	NET WEIGHT
BD-HU-1000	1000KG	860	85	1420	1140	18 sec	AC 0.75	280KG

Standard low profile table (these tables are supplied with loading ramps – 900MM)

	A CAPACITY	B RAISED HEIGHT	C CLOSED HEIGHT	D PLATFORM WIDTH	D PLATFORM LENGTH	LIFTING TIME	POWER PACK	NET WEIGHT
BD-HY-1001	1000KG	860	85	1420	1140	18 sec	AC 0.75	295KG

BOLD MODELS ARE HELD IN STOCK

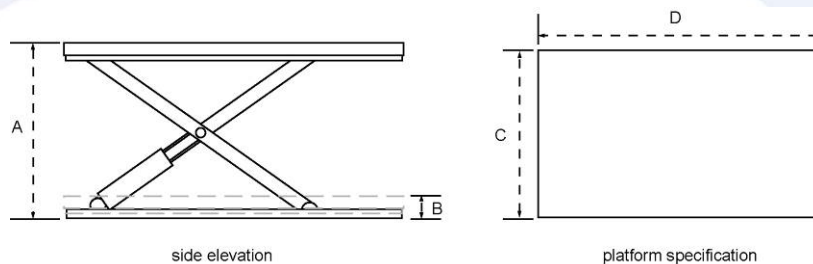

All dimensions are in mm unless otherwise shown