

REACH ²⁵



The Reach 25 is a lightweight, space-efficient 250kg goods lift designed for lighter loads. Designed and manufactured in the UK, it delivers reliable performance in tight spaces. It's robust steel framework, smooth raising and lowering and interlocked gates provide a smooth controlled lift every time.

With flexible platform options and rapid installation, the Reach 25 offers a practical, space-saving solution that meets UKCA and CE compliance standards, keeping your operation efficient, safe and running seamlessly.

- ✓ Free-standing design.
- ✓ Automatic one-touch latching controls.
- ✓ Full height mesh enclosure.
- ✓ Electro-mechanical interlocked gates.
- ✓ 3 Phase power supply.
- ✓ 6-8 weeks from order to install.
- ✓ 1-2 day install for minimal disruption.

Reach Goods Lift Range



Model

Reach 25

Capacity

250kg

Platform size (mm)

to suit

lift height (mm)

from 2,500

No structural work required due to it's self supporting modular construction

Overload monitor to prevent misuse

Safety instructions at both levels

Options of finish including colours to suit your branding



Cladding Galvanised Stainless Steel Painted

Bridging plate on upper level for smooth loading/unloading


Tight mesh for additional safety

Emergency stop button at both levels

One touch latching controls for efficiency

Gates on the platform to obtain and protect the load and operator whilst in transit

Loading ramp for easy loading/unloading (can also be installed in a pit)

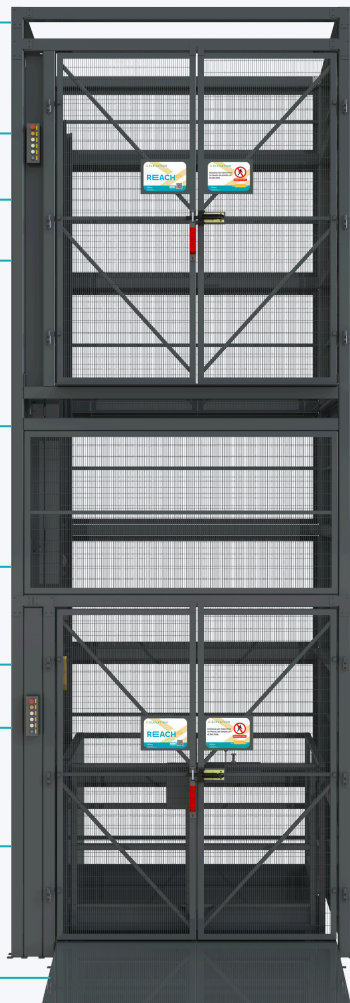

Compact design for minimal factory impact

Outward opening gates to maximise usable space inside the lift


Full height mesh enclosure to prevent access when lift is in operation or unsafe position

Variety of gate options to suit your operation



Hinge Concertina Roller Shutter Bi fold

Choice of loading pattern



Electric box for easy access by trained personnel. Additional interface options available for remote diagnosis



Electro-mechanical interlocked gates to prevent access and prevent access and protect operators when the lift is in operation or in an unsafe position



Powerpack and hydraulic tank with emergency manual lowering