

# REACH<sup>50</sup>



The Reach 50 goods lift is a compact, UK-made goods lift engineered for efficient vertical movement of loads up to 500kg.

It delivers reliable performance with lift heights from 2,500mm and customisable platform dimensions. The Reach 50 combines electro-mechanical operation, anti-drop safety systems and interlocked gates to ensure maximum safety during use.

Built to UKCA and CE standards, it can be installed freestanding, in a pit or with a ramp and is typically ready for installation within 6-8 weeks from order.

- ✓ Free-standing design.
- ✓ Automatic one-touch latching controls.
- ✓ Full height mesh enclosure.
- ✓ Electro-mechanical interlocked gates.
- ✓ 3 Phase power supply.
- ✓ 6-8 weeks from order to install.
- ✓ 1-2 day install for minimal disruption.

## Reach Goods Lift Range



Model

Reach 50

Capacity

500kg

Platform size (mm)

to suit

lift height (mm)

from 2,500

No structural work required due to its self supporting modular construction

Overload monitor to prevent misuse

Safety instructions at both levels

Options of finish including colours to suit your branding



Cladding Galvanised Stainless Steel Painted

Bridging plate on upper level for smooth loading/unloading


Tight mesh for additional safety

Emergency stop button at both levels

One touch latching controls for efficiency

Gates on the platform to obtain and protect the load and operator whilst in transit

Loading ramp for easy loading/unloading (can also be installed in a pit)

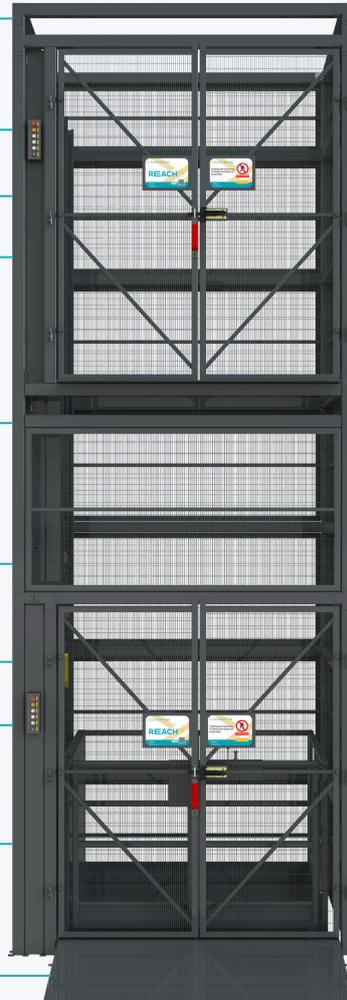

Compact design for minimal factory impact

Outward opening gates to maximise usable space inside the lift

Full height mesh enclosure to prevent access when lift is in operation or unsafe position

Variety of gate options to suit your operation



Hinge Concertina Roller Shutter Bi fold

Choice of loading pattern



Electric box for easy access by trained personnel. Additional interface options available for remote diagnosis



Electro-mechanical interlocked gates to prevent access and protect operators when the lift is in operation or in an unsafe position



Powerpack and hydraulic tank with emergency manual lowering